


입형 부스터 펌프 – 4PPL

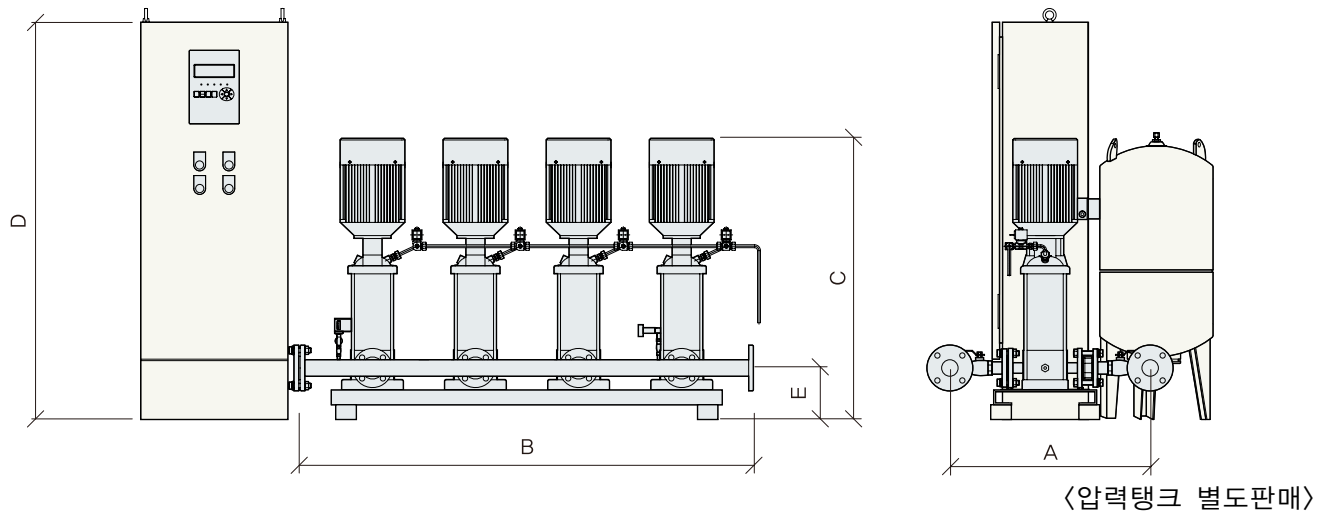

모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	10	12	16	20	24	28	32	36		외형치수(mm)				
	kW	HP													A	B	C	D	E
4PPL4-30	1.5	2	80	24	양정 (m)	42	40	36	32	30	26	22	18		715	1508	675	1450	175
4PPL4-40	1.5	2	80	24		55	52	48	44	41	35	31	24		715	1508	710	1450	175
4PPL4-60	2.2	3	80	24		81	78	73	67	61	54	47	36		715	1508	775	1450	175
4PPL4-80	3.7	5	80	100 (16bar)		109	105	99	92	83	73	63	50		715	1508	895	1450	175
4PPL4-100	3.7	5	80	100 (16bar)		134	130	121	113	103	92	80	61		715	1508	965	1450	175
4PPL4-120	3.7	5	80	100 (16bar)		155	152	145	135	123	110	94	74		715	1508	1000	1450	175
4PPL4-140	5.5	7.5	80	100 (20bar)		182	178	168	165	150	132	112	86		715	1508	1105	1450	175
4PPL4-160	5.5	7.5	80	100 (25bar)		213	207	196	183	168	149	128	99		715	1508	1170	1450	175
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	28	32	36	40	44	48	52	56		외형치수(mm)				
	kW	HP													A	B	C	D	E
4PPL8-30	2.2	3	100	100	양정 (m)	41	40	38	37	35	33	31	30		802	1508	770	1450	180
4PPL8-50	3.7	5	100	100		68	65	63	60	57	55	52	49		802	1508	900	1450	180
4PPL8-60	3.7	5	100	100		83	80	78	74	70	67	63	59		802	1508	930	1450	180
4PPL8-80	5.5	7.5	100	100 (16bar)		114	109	105	101	97	91	85	80		802	1508	1050	1550	180
4PPL8-100	7.5	10	100	100 (16bar)		143	138	133	126	122	115	107	98		802	1508	1110	1550	180
4PPL8-120	7.5	10	100	100 (20bar)		182	175	170	163	155	143	132	118		802	1508	1170	1550	180
4PPL8-140	11	15	100	100 (25bar)		208	203	197	188	180	170	156	140		802	2008	1370	1550	180
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	28	32	40	48	56	64	72	76		외형치수(mm)				
	kW	HP													A	B	C	D	E
4PPL12-20	2.2	3	100	100	양정 (m)	35	34	32	30	28	25	22	21		802	1508	747	1450	180
4PPL12-30	3.7	5	100	100		53	51	49	46	42	38	34	31		802	1508	814	1450	180
4PPL12-50	5.5	7.5	100	100		88	86	81	76	70	63	55	51		802	1508	968	1550	180
4PPL12-70	7.5	10	100	100 (16bar)		124	121	115	108	99	89	77	71		802	1508	1013	1550	180
4PPL12-80	11	15	100	100 (16bar)		141	138	131	122	112	101	89	82		802	1508	1107	1650	180
4PPL12-100	11	15	100	100 (20bar)		178	174	166	155	143	129	113	104		802	2008	1252	1650	180
4PPL12-120	15	20	100	100 (25bar)		213	209	198	186	172	155	136	125		802	2008	1312	1650	180
4PPL12-140	15	20	100	100 (25bar)		249	244	233	219	203	183	159	145		802	2008	1398	1650	180
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	40	48	56	64	72	80	88	96	104	외형치수(mm)				
	kW	HP													A	B	C	D	E
4PPL16-20	3.7	5	125	100	양정 (m)	40	39	38	37	36	34	32	28	26	887	1508	850	1450	190
4PPL16-30	5.5	7.5	125	100		59	57	55	53	50	48	44	40	37	887	1508	995	1550	190
4PPL16-40	7.5	10	125	100		79	77	75	73	70	66	62	56	50	887	1508	1000	1550	190
4PPL16-50	7.5	10	125	100		95	93	90	87	84	79	75	68	60	887	1508	1045	1550	190
4PPL16-60	11	15	125	100 (16bar)		115	112	109	105	101	96	90	84	76	887	2008	1185	1650	190
4PPL16-70	15	20	125	100 (16bar)		136	132	128	124	119	114	107	98	88	887	2008	1230	1650	190
4PPL16-80	15	20	125	100 (16bar)		152	148	144	140	135	129	122	113	100	887	2008	1230	1650	190
4PPL16-100	18.5	25	125	100 (20bar)		202	198	194	188	183	175	165	153	138	887	2008	1455	1650	190

모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎡/h	48	64	80	96	112	128	136			외형치수(mm)					
	kW	HP													A	B	C	D	E	
4PPL20-20	3.7	5	125	200	양정 (m)	38	36	34	31	28	24	22			887	1508	824	1450	190	
4PPL20-30	5.5	7.5	125	200		57	55	52	48	43	37	34			887	1508	970	1550	190	
4PPL20-40	7.5	10	125	200		77	75	71	66	56	51	46			887	1508	1078	1550	190	
4PPL20-50	7.5	10	125	200		97	93	88	81	72	62	56			887	2008	1208	1550	190	
4PPL20-60	11	15	125	200 (16bar)		118	114	108	100	90	78	71			887	2008	1253	1650	190	
4PPL20-70	15	20	125	200 (16bar)		138	134	128	119	107	92	84			887	2008	1298	1650	190	
4PPL20-80	15	20	125	200 (16bar)		157	153	146	136	123	107	96			887	2008	1369	1650	190	
4PPL20-100	18.5	25	125	200 (20bar)		197	192	183	171	156	135	123			887	2008	1489	2100	190	
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎡/h	80	96	112	128	144	160	176	192			외형치수(mm)				
	kW	HP														A	B	C	D	E
4PPL32-20-2	5.5	7.5	150	200	양정 (m)	39	36	34	30	27	24	20	17			1111	2008	1075	1550	225
4PPL32-20	7.5	10	150	200		52	50	48	45	41	37	33	27			1111	2008	1075	1550	225
4PPL32-30	11	15	150	200		78	75	71	67	62	56	48	40			1111	2008	1360	1650	225
4PPL32-40	15	20	150	200		104	101	96	89	83	75	66	55			1111	2008	1430	1650	225
4PPL32-50	18.5	25	150	200 (16bar)		130	125	119	112	104	94	83	69			1111	2008	1545	2100	225
4PPL32-60	18.5	25	150	200 (16bar)		155	150	144	136	126	114	100	81			1111	2008	1615	2100	225
4PPL32-70	22	30	150	200 (20bar)		182	176	168	159	148	133	118	97			1111	2008	1710	2100	225
4PPL32-80	30	40	150	200 (20bar)		205	198	190	180	166	151	135	111			1111	2008	1885	2100	225
4PPL32-90	30	40	150	200 (25bar)		232	226	216	205	189	174	155	127			1111	2008	1955	2100	225
모델	모터		합류관 (mm)	추천탱크 용량 (L)		유량 ㎡/h	120	140	160	180	200	220	240	260			외형치수(mm)			
	kW	HP			A												B	C	D	E
4PPL45-10-1	5.5	7.5	200	300	양정 (m)	29	28	26	24	22	21	19	16			1239	2008	1058	1550	260
4PPL45-10	7.5	10	200	300		34	33	32	31	29	27	25	22			1239	2008	1058	1500	260
4PPL45-20-2	11	15	200	300		59	57	54	52	48	44	40	35			1239	2008	1158	1650	260
4PPL45-20	15	20	200	300		70	68	66	63	60	56	52	47			1239	2008	1158	1650	260
4PPL45-30-2	18.5	25	200	300		93	90	88	84	80	74	67	59			1239	2008	1483	2100	260
4PPL45-30	18.5	25	200	300 (16bar)		106	104	100	96	92	86	80	70			1239	2008	1483	2100	260
4PPL45-40-2	22	30	200	300 (16bar)		130	126	122	117	112	105	97	85			1239	2008	1588	2100	260
4PPL45-40	30	40	200	300 (16bar)		143	140	136	130	124	117	108	97			1239	2008	1693	2100	260
4PPL45-50-2	30	40	200	300 (16bar)		163	160	155	149	143	133	123	110			1239	2008	1773	2100	260
4PPL45-50	30	40	200	300 (20bar)		177	172	168	162	154	144	134	121			1239	2008	1773	2100	260
4PPL45-60-2	37	50	200	300 (20bar)		198	194	187	180	173	163	150	134			1239	2008	1853	2100	260
4PPL45-60	37	50	200	300 (25bar)		211	206	200	193	184	174	162	146			1239	2008	1853	2100	260
4PPL45-70-2	45	60	200	300 (25bar)		234	227	220	212	203	190	178	164			1239	2008	1978	2100	260
4PPL45-70	45	60	200	300 (25bar)		247	242	234	225	215	204	190	175			1239	2008	1978	2100	260
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎡/h	160	200	240	280	320	360	400	520			외형치수(mm)				
	kW	HP														A	B	C	D	E
4PPL65-10-1	7.5	10	250	300	양정 (m)	32	28	26	23	19	15	10				1290	2008	1171	1550	260
4PPL65-10	11	15	250	300		40	37	35	33	30	27	24				1290	2008	1281	1500	260
4PPL65-20-2	15	20	250	300		55	52	48	45	40	35	27				1290	2008	1364	1650	260
4PPL65-20	22	30	250	300		81	78	74	70	65	58	50				1290	2008	1434	1650	260
4PPL65-30-2	22	30	250	300		97	93	88	81	71	64	55				1290	2008	1516	2100	260
4PPL65-30	30	40	250	300 (16bar)		127	123	118	112	103	93	67				1290	2008	1621	2100	260
4PPL65-40-2	37	50	250	300 (16bar)		139	134	27	118	108	96	81				1290	2008	1704	2100	260
4PPL65-40	45	60	250	300 (16bar)		160	155	148	140	130	120	107				1290	2008	1749	2100	260
4PPL65-50-2	45	60	250	300 (20bar)		176	171	164	156	146	123	115				1290	2008	1831	2100	260
모델	모터		합류관 (mm)	추천탱크 용량 (L)		유량 ㎡/h	240	280	320	360	400	440	480	520			외형치수(mm)			
	kW	HP			A												B	C	D	E
4PPL90-10-1	11	15	300	300	양정 (m)	31	28	25	22	18	15	12	10			1357	2008	1181	1550	260
4PPL90-10	15	20	300	300		40	38	35	33	29	28	26	22			1357	2008	1181	1500	260
4PPL90-20-2	18.5	25	300	300		56	52	48	44	40	36	32	27			1357	2008	1428	1650	260
4PPL90-20-1	22	30	300	300		70	65	60	56	51	47	41	36			1357	2008	1453	1650	260
4PPL90-20	30	40	300	300		84	79	75	70	65	60	55	50			1357	2008	1558	1650	260
4PPL90-30-2	37	50	300	300 (16bar)		106	101	95	87	80	73	65	55			1357	2008	1650	2100	260
4PPL90-30-1	37	50	300	300 (16bar)		119	114	107	99	92	83	75	64			1357	2008	1650	2100	260
4PPL90-30	45	60	300	300 (16bar)		132	126	120	112	105	96	86	76			1357	2008	1695	2100	260
4PPL90-40-2	45	60	300	300 (16bar)		150	143	136	127	108	108	96	83			1357	2008	1787	2100	260