


입형 부스터 펌프 – 3PPL

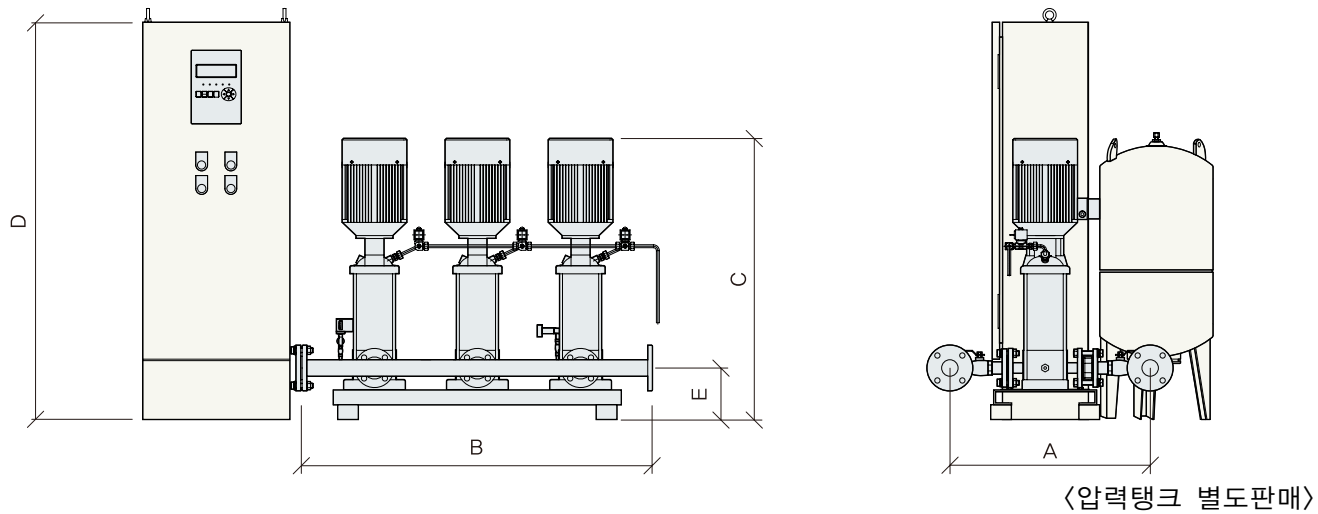

모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	7.5	9	12	15	18	21	24	27		외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL4-30	1.5	2	65	24	양정 (m)	42	40	36	32	30	26	22	18		697	1008	675	1350	175
3PPL4-40	1.5	2	65	24		55	52	48	44	41	35	31	24		697	1008	710	1350	175
3PPL4-60	2.2	3	65	24		81	78	73	67	61	54	47	36		697	1008	775	1350	175
3PPL4-80	3.7	5	65	100 (16bar)		109	105	99	92	83	73	63	50		697	1008	895	1350	175
3PPL4-100	3.7	5	65	100 (16bar)		134	130	121	113	103	92	80	61		697	1008	965	1350	175
3PPL4-120	3.7	5	65	100 (16bar)		155	152	145	135	123	110	94	74		697	1008	1000	1350	175
3PPL4-140	5.5	7.5	65	100 (20bar)		182	178	168	165	150	132	112	86		697	1008	1105	1350	175
3PPL4-160	5.5	7.5	65	100 (25bar)		213	207	196	183	168	149	128	99		697	1008	1170	1350	175
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	21	24	27	30	33	36	39	42		외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL8-30	2.2	3	80	24	양정 (m)	41	40	38	37	35	33	31	30		777	1008	770	1350	180
3PPL8-50	3.7	5	80	24		68	65	63	60	57	55	52	49		777	1008	900	1350	180
3PPL8-60	3.7	5	80	24		83	80	78	74	70	67	63	59		777	1008	930	1350	180
3PPL8-80	5.5	7.5	80	100 (16bar)		114	109	105	101	97	91	85	80		777	1008	1050	1450	180
3PPL8-100	7.5	10	80	100 (16bar)		143	138	133	126	122	115	107	98		777	1008	1110	1450	180
3PPL8-120	7.5	10	80	100 (20bar)		182	175	170	163	155	143	132	118		777	1008	1170	1450	180
3PPL8-140	11	15	80	100 (25bar)		208	203	197	188	180	170	156	140		777	1343	1370	1450	180
모델	모터		합류관 (mm)	추천탱크 용량 (L)		유량 ㎥/h	21	24	30	36	42	48	54	57		외형치수(mm)			
	kW	HP			A											B	C	D	E
3PPL12-20	2.2	3	80	100	양정 (m)	35	34	32	30	28	25	22	21		777	1008	747	1350	180
3PPL12-30	3.7	5	80	100		53	51	49	46	42	38	34	31		777	1008	814	1350	180
3PPL12-50	5.5	7.5	80	100		88	86	81	76	70	63	55	51		777	1008	968	1350	180
3PPL12-70	7.5	10	80	100 (16bar)		124	121	115	108	99	89	77	71		777	1008	1013	1350	180
3PPL12-80	11	15	80	100 (16bar)		141	138	131	122	112	101	89	82		777	1008	1107	1450	180
3PPL12-100	11	15	80	100 (20bar)		178	174	166	155	143	129	113	104		777	1343	1252	1450	180
3PPL12-120	15	20	80	100 (25bar)		213	209	198	186	172	155	136	125		777	1343	1312	1450	180
3PPL12-140	15	20	80	100 (25bar)		249	244	233	219	203	183	159	145		777	1343	1398	1450	180
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	30	36	42	48	54	60	66	72	78	외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL16-20	3.7	5	100	100	양정 (m)	40	39	38	37	36	34	32	28	26	861	1008	850	1350	190
3PPL16-30	5.5	7.5	100	100		59	57	55	53	50	48	44	40	37	861	1008	995	1350	190
3PPL16-40	7.5	10	100	100		79	77	75	73	70	66	62	56	50	861	1008	1000	1350	190
3PPL16-50	7.5	10	100	100		95	93	90	87	84	79	75	68	60	861	1008	1045	1350	190
3PPL16-60	11	15	100	100 (16bar)		115	112	109	105	101	96	90	84	76	861	1508	1185	1450	190
3PPL16-70	15	20	100	100 (16bar)		136	132	128	124	119	114	107	98	88	861	1508	1230	1450	190
3PPL16-80	15	20	100	100 (16bar)		152	148	144	140	135	129	122	113	100	861	1508	1230	1450	190
3PPL16-100	18.5	25	100	100 (20bar)		202	198	194	188	183	175	165	153	138	861	1508	1455	1450	190

모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	36	48	60	72	84	96	102			외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL20-20	3.7	5	100	100	양정 (m)	38	36	34	31	28	24	22			861	1008	824	1350	190
3PPL20-30	5.5	7.5	100	100		57	55	52	48	43	37	34			861	1008	970	1450	190
3PPL20-40	7.5	10	100	100		77	75	71	66	56	51	46			861	1008	1078	1450	190
3PPL20-50	7.5	10	100	100		97	93	88	81	72	62	56			861	1508	1208	1450	190
3PPL20-60	11	15	100	100 (16bar)		118	114	108	100	90	78	71			861	1508	1253	1550	190
3PPL20-70	15	20	100	100 (16bar)		138	134	128	119	107	92	84			861	1508	1298	1550	190
3PPL20-80	15	20	100	100 (16bar)		157	153	146	136	123	107	96			861	1508	1369	1550	190
3PPL20-100	18.5	25	100	100 (20bar)		197	192	183	171	156	135	123			861	1508	1489	1650	190
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	60	72	84	96	108	120	132	144		외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL32-20-2	5.5	7.5	100	200	양정 (m)	39	36	34	30	27	24	20	17		1086	1508	1075	1450	225
3PPL32-20	7.5	10	100	200		52	50	48	45	41	37	33	27		1086	1508	1075	1450	225
3PPL32-30	11	15	100	200		78	75	71	67	62	56	48	40		1086	1508	1360	1550	225
3PPL32-40	15	20	100	200		104	101	96	89	83	75	66	55		1086	1508	1430	1550	225
3PPL32-50	18.5	25	100	200 (16bar)		130	125	119	112	104	94	83	69		1086	1508	1545	1650	225
3PPL32-60	18.5	25	100	200 (16bar)		155	150	144	136	126	114	100	81		1086	1508	1615	1650	225
3PPL32-70	22	30	100	200 (20bar)		182	176	168	159	148	133	118	97		1086	1508	1710	1650	225
3PPL32-80	30	40	100	200 (20bar)		205	198	190	180	166	151	135	111		1086	1508	1885	1650	225
3PPL32-90	30	40	100	200 (25bar)		232	226	216	205	189	174	155	127		1086	1508	1955	1650	225
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	90	105	120	135	150	165	180	195		외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL45-10-1	5.5	7.5	125	200	양정 (m)	29	28	26	24	22	21	19	16		1239	1508	1058	1450	260
3PPL45-10	7.5	10	125	200		34	33	32	31	29	27	25	22		1239	1508	1058	1450	260
3PPL45-20-2	11	15	125	200		59	57	54	52	48	44	40	35		1239	1508	1158	1550	260
3PPL45-20	15	20	125	200		70	68	66	63	60	56	52	47		1239	1508	1158	1550	260
3PPL45-30-2	18.5	25	125	200		93	90	88	84	80	74	67	59		1239	1508	1483	1650	260
3PPL45-30	18.5	25	125	200 (16bar)		106	104	100	96	92	86	80	70		1239	1508	1483	1650	260
3PPL45-40-2	22	30	125	200 (16bar)		130	126	122	117	112	105	97	85		1239	1508	1588	2100	260
3PPL45-40	30	40	125	200 (16bar)		143	140	136	130	124	117	108	97		1239	1508	1693	2100	260
3PPL45-50-2	30	40	125	200 (16bar)		163	160	155	149	143	133	123	110		1239	1508	1773	2100	260
3PPL45-50	30	40	125	200 (20bar)	177	172	168	162	154	144	134	121		1239	1508	1773	2100	260	
3PPL45-60-2	37	50	125	200 (20bar)	198	194	187	180	173	163	150	134		1239	1508	1853	2100	260	
3PPL45-60	37	50	125	200 (25bar)	211	206	200	193	184	174	162	146		1239	1508	1853	2100	260	
3PPL45-70-2	45	60	125	200 (25bar)	234	227	220	212	203	190	178	164		1239	1508	1978	2100	260	
3PPL45-70	45	60	125	200 (25bar)	247	242	234	225	215	204	190	175		1239	1508	1978	2100	260	
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	120	150	180	210	240	270	300	390		외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL65-10-1	7.5	10	200	300	양정 (m)	32	28	26	23	19	15	10			1239	1508	1171	1450	260
3PPL65-10	11	15	200	300		40	37	35	33	30	27	24			1239	1508	1281	1450	260
3PPL65-20-2	15	20	200	300		55	52	48	45	40	35	27			1239	1508	1364	1550	260
3PPL65-20	22	30	200	300		81	78	74	70	65	58	50			1239	1508	1434	1550	260
3PPL65-30-2	22	30	200	300		97	93	88	81	71	64	55			1239	1508	1516	1650	260
3PPL65-30	30	40	200	300 (16bar)		127	123	118	112	103	93	67			1239	1508	1621	1650	260
3PPL65-40-2	37	50	200	300 (16bar)		139	134	27	118	108	96	81			1239	1508	1704	2100	260
3PPL65-40	45	60	200	300 (16bar)		160	155	148	140	130	120	107			1239	1508	1749	2100	260
3PPL65-50-2	45	60	200	300 (20bar)		176	171	164	156	146	123	115			1239	1508	1831	2100	260
모델	모터		합류관 (mm)	추천탱크 용량 (L)	유량 ㎥/h	180	210	240	270	300	330	360	390		외형치수(mm)				
	kW	HP													A	B	C	D	E
3PPL90-10-1	11	15	250	300	양정 (m)	31	28	25	22	18	15	12	10		1305	1508	1181	1450	260
3PPL90-10	15	20	250	300		40	38	35	33	29	28	26	22		1305	1508	1181	1450	260
3PPL90-20-2	18.5	25	250	300		56	52	48	44	40	36	32	27		1305	1508	1428	1550	260
3PPL90-20-1	22	30	250	300		70	65	60	56	51	47	41	36		1305	1508	1453	1550	260
3PPL90-20	30	40	250	300		84	79	75	70	65	60	55	50		1305	1508	1558	1550	260
3PPL90-30-2	37	50	250	300 (16bar)		106	101	95	87	80	73	65	55		1305	1508	1650	1650	260
3PPL90-30-1	37	50	250	300 (16bar)		119	114	107	99	92	83	75	64		1305	1508	1650	1650	260
3PPL90-30	45	60	250	300 (16bar)		132	126	120	112	105	96	86	76		1305	1508	1695	1650	260
3PPL90-40-2	45	60	250	300 (16bar)		150	143	136	127	108	108	96	83		1305	1508	1787	2100	260